## **Product specification sheet**




- Profile type: 214	
- Description:	Edge trim made of aluminium
- Application:	For straight laying laminate, parquet (multi-layer) and solid wood
- Countersunk drilled:	countersunk drilled for 3.0 mm screw heads
- Length:	2.70 m and 0.90 m
- Width:	32 mm
- Gauge:	13 - 14.2 mm (with two bending points)
- Alloy:	AIMgSi0,5F22
- Anodized colors:	F4 silver, F5 gold, F9 sand, F6 bronze, F2 stainless steel optic
- Additional colors:	F3 aluminium polished
- Installation:	fastening with screws and dowels (plugs) or gluing with

suitable adhesives

## **Produkt specification sheet**



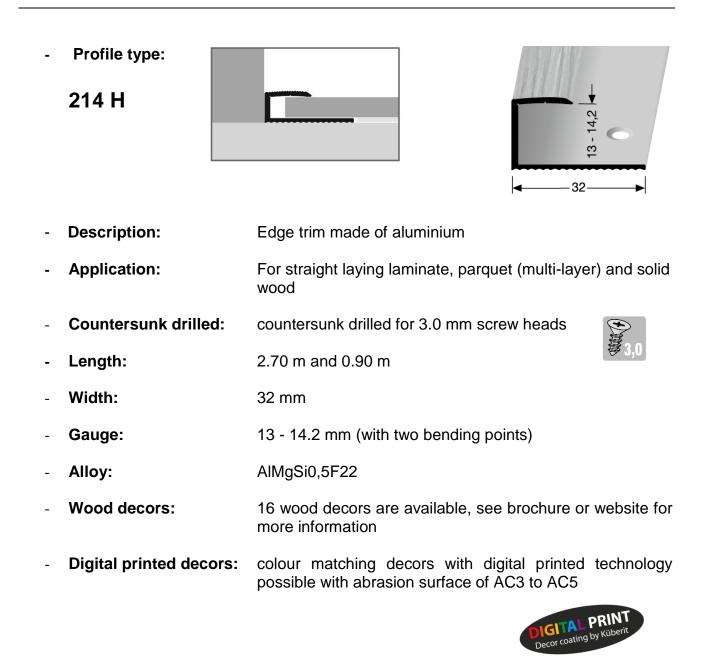

- Installation: fastening with screws and dowels (plugs) or gluing with suitable adhesives

Seite/page 2 von/of 3

© Küberit 2017

## **Produkt specification sheet**



## Installation/Laying

- 1. Ensure the surfaces to which the profile is to be fixed are clean, dry and flat.
- 2. Trim the profile to the required size.
- 3. Place the profile in position and mark the position of the screw holes onto the substrate.
- 4. Drill the substrate with a diameter of 5.0 mm to a depth of 30 35 mm and insert suitable fixing plugs into the holes.
- 5. Using countersunk screws, fix through the profile into the plugs and tighten.
- 6. The profiles can be glue down with a suitable glue. Ask your supplier of glue for more information.

For further information, for the installation use our installation instructions which you find on our website <u>www.kueberit.com</u> under service.

Videos are as well under service or on YouTube <u>https://www.youtube.com/user/Kueberit</u> and you find additional information in our catalogue "Küberit-Best".

The indicated data are typical or average values, but are not assured attributes. This product is not subject to the Construction Products Regulation.

Seite/page 3 von/of 3