



# Product specification sheet



- **Profile Type:**

**248**

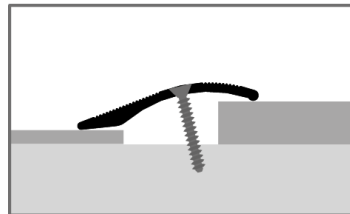

- **Description:**

edge trim

- **Countersunk drilled:**

Standard with countersunk drilled holes for



- **Length:**

3.0 m; 2.7 m; 1.0 m

- **Width:**

40 mm

- **Height:**

5 mm

- **For flooring heights:**

0-18 mm

- **Alloy of the profile:**

Aluminium: EN AW-6060 (AlMgSi0,5F22)

- **Anodized colours:**

**F4** silver, **F4G** silver brushed, **F9** sand,  
**F2G** stainless steel optic brushed

- **Additional colours:**

**F3** aluminium polished

- **Additional versions:**

248 SK see second page

- **Additional colours:**

see second page

- **Fire Protection Class:**

A1 = non-combustible

- **Installation:**

fastening with screws and dowels (plugs) or gluing with suitable adhesives



The indicated data are typical or average values, but are not assured attributes. This product is not subject to the Construction Products Regulation.

# Product specification sheet



- **Profile Type:**

**248 SK**

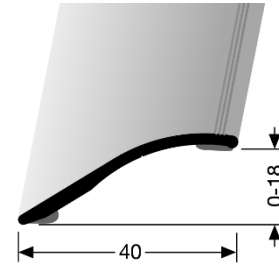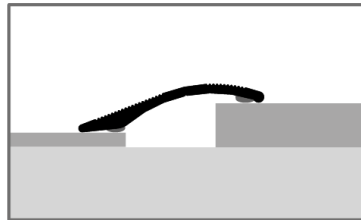

- **Description:** edge trim
- **Version:** self-adhesive
- **Length:** 3.0 m; 2.70 m; 1.0 m
- **Width:** 40 mm
- **Height:** 0-18 mm
- **Alloy of the profile:** AlMgSi0,5F22
- **Anodized colours:** **F4** silver, **F4G** silver brushed, **F9** sand, **F2G** stainless steel optic brushed
- **Additional colours:** **F3** aluminium polished
- **Powder coated colors:** **F15** white brilliant (RAL9016)  
**F16** black matt (RAL9005)  
Powder coated is available only in self-adhesive
- **Fire Protection Class:** A1 = non-combustible
- **Installation:** gluing (depending on surface with suitable adhesives in addition)

The indicated data are typical or average values, but are not assured attributes. This product is not subject to the Construction Products Regulation.