




Product specification sheet

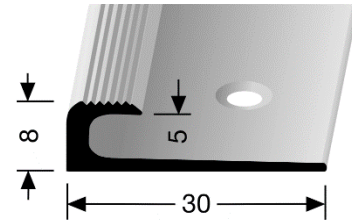

- **Profile Type:**

806

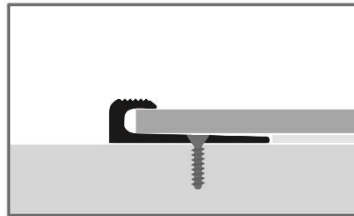

- **Description:** edge trim
- **Countersunk drilled:** countersunk drilled for 3.0 mm screw heads 
- **Length:** 5.00 m, 2.50 m and 1.00 m
- **Width:** 30 mm
- **Height:** 8.0 mm
- **Gauge:** 5.0 mm
- **Additional versions:** 806 EB (easy bendable); see separate sheet
- **Alloy:** AlMgSi0,5F22
- **Anodized colours:** **F4** silver, **F5** gold, **F9** sand, **F6** bronze, **F2** stainless steel optic
- **Additional colours:** **F3** aluminium polished
- **Installation:** fastening with screws and dowels (plugs) or gluing with suitable adhesives

Product specification sheet



The indicated data are typical or average values, but are not assured attributes. This product is not subject to the Construction Products Regulation.

Installation/Laying

1. Ensure the surfaces to which the profile is to be fixed are clean, dry and flat.
2. Trim the profile to the required size.
3. Place the profile in position and mark the position of the screw holes onto the substrate.
4. Drill the substrate with a diameter of 5.0 mm to a depth of 30 – 35 mm and insert suitable fixing plugs into the holes.
5. Using screws, fix through the profile into the plugs and tighten.

For further information for the installation use our video which you find on our website www.kueberit.com under downloads and you find additional information in our catalogue "Küberit-Best".